

WINGET



100T, 150T, 175T, 200T, 100TFT, 150TFT, 175TFT HAND FED TILTING DRUM MIXERS

- Hand-fed concrete mixers from 100 litre to 200 litre mixed batch output •
- All models capable of mixing at a rate of 12 batches per hour giving production output rates ranging from 1.2 to 2.4 cubic metres per hour •
- Robustly engineered with fully enclosed drivelines, Winget mixers provide safe, reliable performance and long service life •
- Positive, heavy duty driveline using roller chain, bevel wheel and pinion •
- Highly efficient, two piece heavy gauge, spun steel drum • Multi-position lockable drum •
- Winget mixers for sale in the EC are CE marked •
- Winget is an ISO 9001 accredited company •
- Fast Tow trailer models available equipped with adjustable towbar, pneumatic tyres, mudguards and independent suspension •
- Engine options: Yanmar electric start diesel, Lister Petter hand start diesel, Honda recoil start petrol (selected models only) or 110v/240v electric motors •

100T, 150T, 175T, 200T, 100TFT, 150TFT, 175TFT HAND FED TILTING DRUM MIXERS



STANDARD 4 WHEEL MODEL (100T, 150T, 175T, 200T)

ENGINE OPTIONS:
Yanmar L48 electric start diesel engine
Lister Petter LT1/LV1 hand start diesel engine
Honda GX160 recoil start petrol engine
(selected models)
110v/240v electric motor driven

FAST TOW MODEL (100TFT, 150TFT, 175TFT)

Chassis: Heavy gauge, box section chassis gives clean lines and less material traps. Fitted with lifting points.

Drum: Two piece, spun steel drum assures long life and easy replacement. Highly efficient drum design and twin fast-acting blades ensure thorough mixing and eliminate clogging and wasteful 'build-up'.

Engine Options: Yanmar electric start diesel, Lister Petter hand start diesel, Honda recoil start petrol or 110v/240v single phase electric motor.

Driveline: Totally enclosed, heavy duty driveline through roller chain or drive belt, bevel wheel and cast steel pinion.

Access: Good all round access to daily check points, service items and all replaceable components.

Operation: Careful design ensures maximum working space around the machine for charging, mixing and discharging.

Axles/Wheels: Fixed rear axle and swivelling front axle fitted with four rubber cushion tyres and towbar on standard 4 wheel model or two pneumatic tyres C/W mudguards and towbar on fast tow model.


CAPACITIES	100T/100TFT	150T/150TFT	175T/175TFT	200T
Mixed Batch Output	100 litres (3 1/2 ft ³)	150 litres (5 ft ³)	175 litres (6 ft ³)	200 litres (7 ft ³)
Nominal Capacity (unmixed)	150 litres (5 ft ³)	200 litres (7 ft ³)	240 litres (8 1/2 ft ³)	285 litres (10 ft ³)
Gross Drum Volume	263 litres	362 litres	377 litres	485 litres
Drum Speed (rev/min)	22	22	22	22
Production Rate (max) m ³ /hr (ft ³ /hr)	1.2 (42)	1.8 (64)	2.1 (74)	2.4 (85)

DIMENSIONS (standing on wheels)


STANDARD MODELS	100T	150T	175T	200T
A Overall Length	1.55m	1.65m	1.70m	2.17m
B Overall Width	0.82m	0.93m	0.93m	1.11m
C Overall Height	1.57m	1.71m	1.77m	1.82m
D Loading Height	1.00m	1.10m	1.11m	1.13m
E Discharge Height	0.54m	0.57m	0.52m	0.66m
Machine Weight	370kg	410kg	460kg	600kg

FAST TOW MODELS	100TFT	150TFT	175TFT
A1 Overall Length (operational)	1.72m	1.91m	2.06m
A2 Overall Length (transportational)	2.37m	2.48m	2.64m
B Overall Width	1.24m	1.32m	1.35m
C Overall Height	1.63m	1.77m	1.34m
D Loading Height	1.06m	1.14m	1.18m
E Discharge Height	0.6m	0.61m	0.59m
F Height to Towbar	0.43m	0.48m	0.45m
Machine Weight	395kg	482kg	500kg

Standard Model

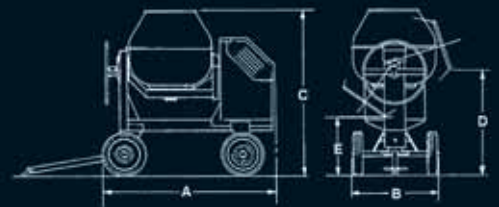

Fast Tow Model

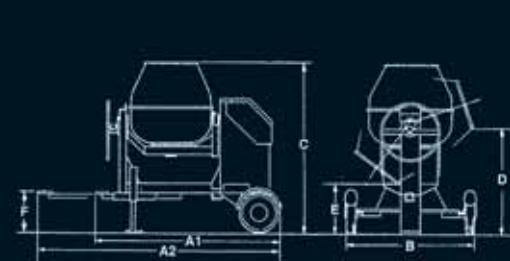

WINGET LIMITED

PO Box 41, Edgefold Industrial Estate, Plodder Lane, Bolton BL4 0LS, England.

Tel: +44 1204 854650 Fax: +44 1204 854663 Parts/Purchasing or: +44 1204 854664 General/Sales

Email: sales@winget.co.uk · Web: www.winget.co.uk

Due to our policy of continual development, Winget Limited reserve the right to change specifications without further notice.

