




TD500 HL & TD650



- conservatory building
- landscaping
- pond building
- kerbing
- house clearance
- groundcare
- market gardening
- golf course maintenance
- swimming pool building
- fence erection
- stables
- farming
- forestry
- house extensions
- refurbishing
- flagging
- park maintenance
- plant & tool hire
- viticulture
- groundwork
- gardening
- ...

TD500 HL & TD650

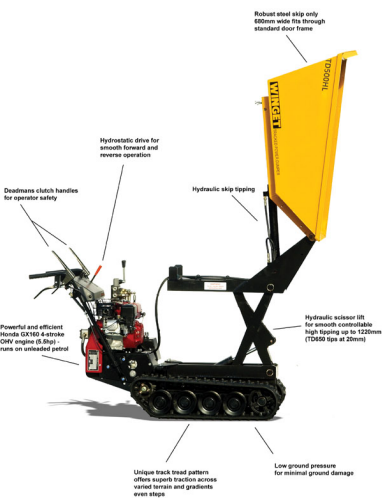

- High tip over the side of skips or standard tip
- Narrow access - only 680 mm wide
- Hydrostatic Drive - smooth forward / reverse up to 4 km/h
- Rubber Tracks - superb traction and low ground pressure
- Safe to operate - deadmans handles

TD500 HL & TD650



TD500 HL Hydraulic High Tip (500kg)



A Overall length	1.96m
B Overall width	0.68m
C Overall height	1.130m
D Maximum height when skip tipped (scissors lowered)	1.960m
E Skip loading height (scissors lowered)	0.7m
F Skip discharge height (scissors lowered)	0.80m
G Forward discharge distance	0.28m
H Skip loading height (scissors raised)	1.125m
J Skip discharge height (scissors raised)	1.220m
K Maximum height skip raised (scissors raised)	2.460m
Machine weight:	317 kg

TD650 ^{NEW} Hydraulic Standard Tip (650kg)



A Overall length	1.96m
B Overall width	0.68m
C Overall height	1.13m
D Maximum height when skip tipped	1.34m
E Skip loading height	0.6m
F Skip discharge height	0.62m
Machine weight:	249 kg

LUBRICANTS & CAPACITIES (Total-Fina factory fill)

Hydraulic Oil	Azzola ZS46 (capacity 5 litres)
Grease	Multis EP2
General lubricating oil (pivot pins)	Rubia B20W/30

PRESSURES

Hydraulic Pressure	2500psi (172 bar)
--------------------	-------------------

MAXIMUM PAYLOAD CAPACITY

On level ground	TD500HL 500kgs	TD650 650kgs
On gradients	350kgs	350kgs

MAXIMUM GRADIENT

Maximum Downward Gradient	15°
Maximum Upward Gradient	20°

NOISE LEVELS

Operators Ear	85LPA
Directive 2000/14/EC	101LWA

TRAVEL SPEED

Forward Travel	0-4.3 km/h
Reverse Travel	0-3.6 km/h

VIBRATION AT HANDLEBARS

Hand/Arm Vibration (EN1033)	11 m/s@3600 rpm
-----------------------------	-----------------

