

WINGET

Hand Fed Tilting Drum
Site Mixers



*100T, 150T 175T, 200T
100TFT, 150TFT, 175TFT*

WINGET

Hand Fed Tilting Drum
Site Mixers



100T (5 / 3.5) - 100 litres wet batch output
150 litres dry unmixed capacity.up to 1.2m³/hr
Yanmar electric start or Lister Petter hand start diesels
Standard 4 wheel chassis - site mobile



150T (7 / 5) - 150 litres wet batch output
200 litres dry unmixed capacity.up to 1.8m³/hr
Yanmar electric start or Lister Petter hand start diesels
Standard 4 wheel chassis - site mobile



175T (8.5 / 6.5) - 175 litres wet batch output
240 litres dry unmixed capacity.up to 2.1m³/hr
Yanmar electric start or Lister Petter hand start diesels
Standard 4 wheel chassis - site mobile



200T (10 / 7) - 200 litres wet batch output
285 litres dry unmixed capacity.up to 2.4m³/hr
Yanmar electric start or Lister Petter hand start diesels
Standard 4 wheel chassis - site mobile



100TFT (5 / 3.5) - 100 litres wet batch output
150 litres dry unmixed capacity.up to 1.2m³/hr
Yanmar electric start or Lister Petter hand start diesels
Fast Tow chassis



150TFT (7 / 5) - 150 litres wet batch output
200 litres dry unmixed capacity.up to 1.8m³/hr
Yanmar electric start or Lister Petter hand start diesels
Fast Tow chassis




175TFT (8.5 / 6.5) - 175 litres wet batch output
240 litres dry unmixed capacity.up to 2.1m³/hr
Yanmar electric start or Lister Petter hand start diesels
Fast Tow chassis

WINGET

Hand Fed Tilting Drum
Site Mixers

MIX WITH THE BEST

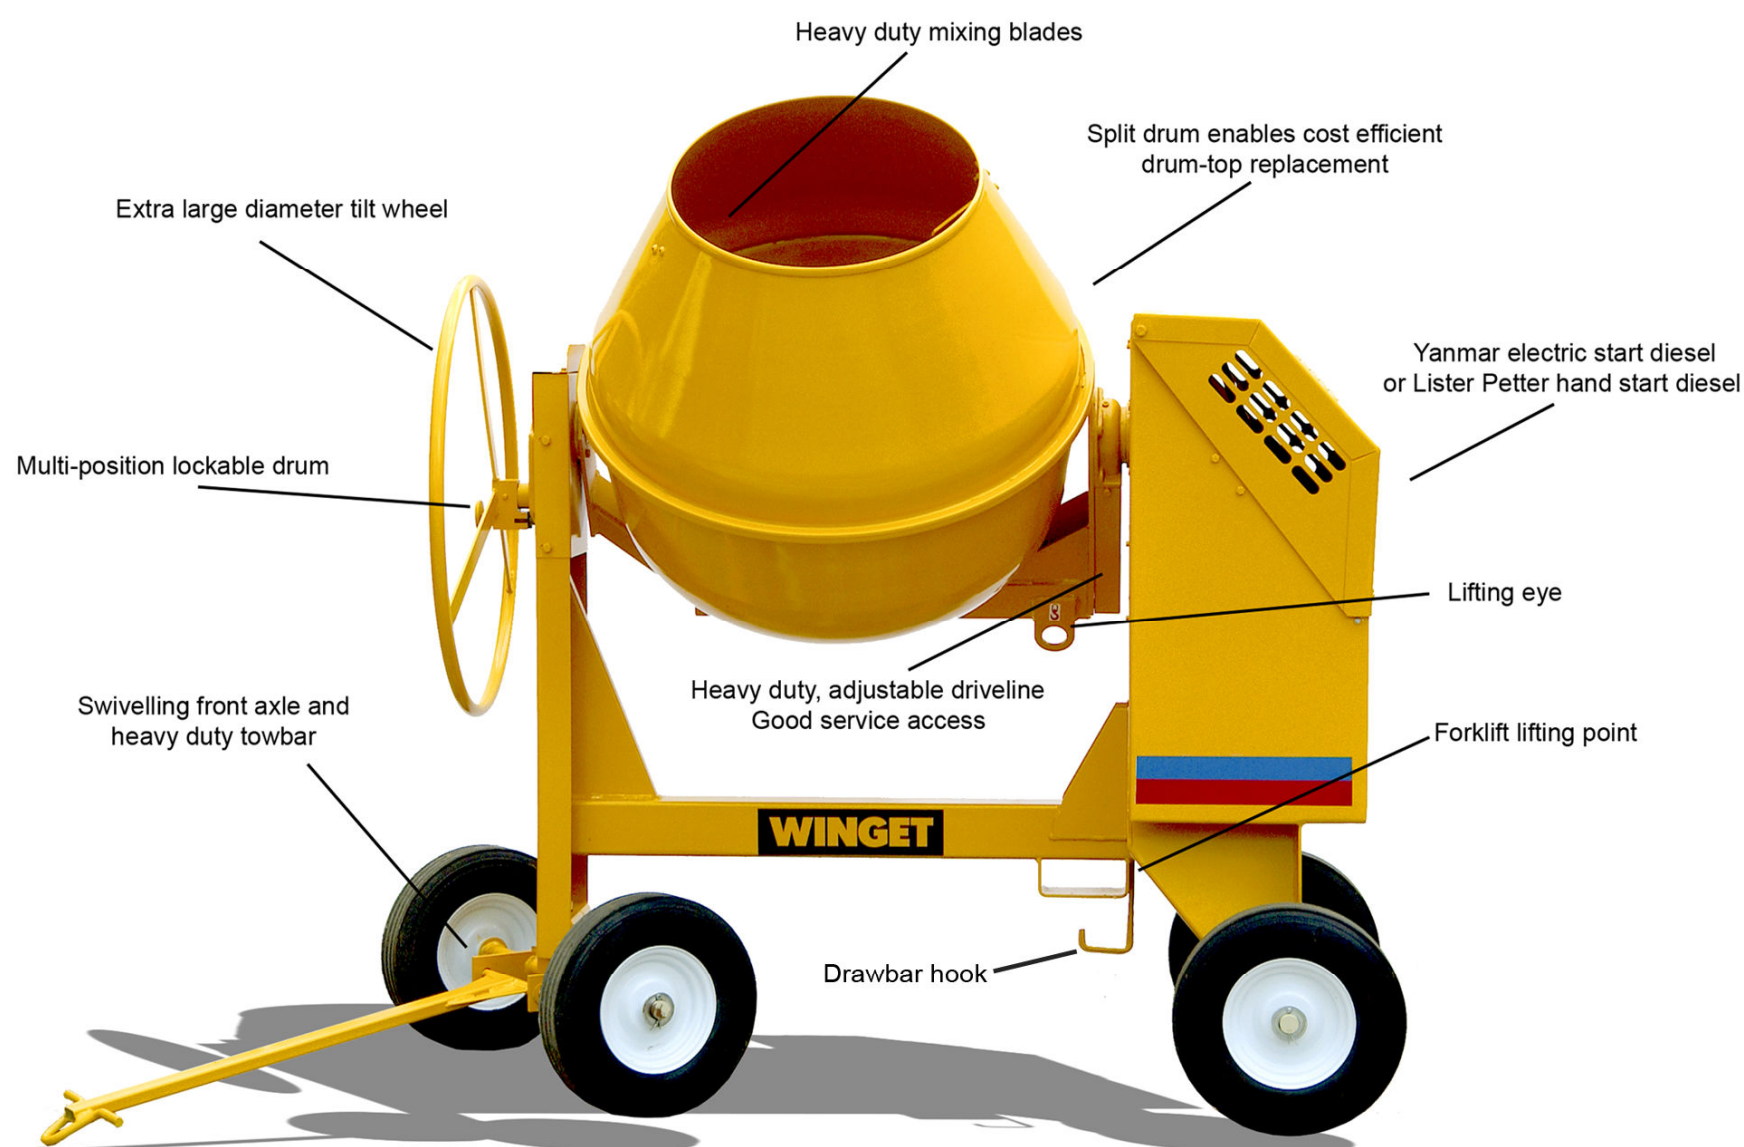

Models available with mixed batch outputs from 100 to 200 litres

Capable of mixing 12 batches per hour giving output rates of 1.2 to 2.4 m³/hr

Robustly engineered throughout to provide a safe, reliable and long service life



Heavy duty, fully enclosed driveline

Highly efficient, two piece, heavy gauge spun steel drum

WINGET mixers for sale in the EC are CE marked

WINGET is an ISO9001 accredited company

100T,150T,175T, 200T
100TFT, 150TFT,175TFT

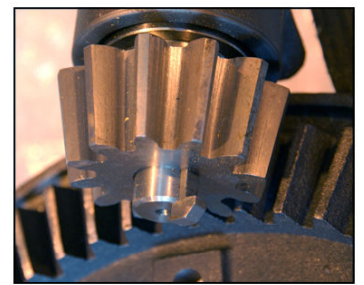

Chassis: Heavy duty, box section chassis gives clean lines and less material traps. Fitted with lifting points.

Drum: Two piece, spun steel drum assures long life and easy replacement. Highly efficient drum design and twin fast acting blades ensure thorough mixing and eliminate clogging and wasteful 'build-up'.

Driveline: Totally enclosed, heavy duty driveline through roller chain or drive belt, bevel wheel and cast steel pinion.

Access: Good all round access to daily check points, service items and all replaceable components.

Operation: Careful design ensures maximum working space around the machine for charging, mixing and discharging.

Axles / Wheels: Fixed rear axle and swivelling front axle fitted with four rubber cushion tyres and towbar on standard 4 wheel model or 2 pneumatic tyres (with mudguards) and towbar on fast tow model.



Lister Petter LV1 hand start diesel



Yanmar L48 electric start diesel


Noise Levels: 100T, 150T, 175T - 80LPA / 101LWA.
200T - 83LPA / 102LWA (hand start), 80 LPA / 101LWA (electric start)

CAPACITIES	100T / 100TFT	150T / 150TFT	175T / 175TFT	200T
Mixed batch output	100 litres	150 litres	175 litres	200 litres
Unmixed capacity	150 litres	200 litres	240 litres	285 litres
Gross drum volume	263 litres	362 litres	377 litres	485 litres
Drum speed	22 rev/min	22 rev/min	22 rev/min	22 rev/min
Production rate (max)	1.2 m ³ /hr	1.8 m ³ /hr	2.1 m ³ /hr	2.4 m ³ /hr


STANDARD MODELS	100T	150T	175T	200T
A Overall Length	1.55m	1.65m	1.70m	2.17m
B Overall Width	0.82m	0.93m	0.93m	1.11m
C Overall Height	1.57m	1.71m	1.77m	1.82m
D Loading Height	1.00m	1.10m	1.11m	1.13m
E Discharge Height	0.54m	0.57m	0.52m	0.66m
Machine weight	370kg	410kg	460kg	600kg

FAST TOW MODELS	100TFT	150TFT	175TFT
A1 Overall Length (operational)	1.72m	1.91m	2.06m
A2 Overall Length (for transportation)	2.37m	2.48m	2.64m
B Overall Width	1.24m	1.32m	1.35m
C Overall Height	1.63m	1.77m	1.34m
D Loading Height	1.06m	1.14m	1.18m
E Discharge Height	0.60m	0.61m	0.59m
F Height to Towbar	0.43m	0.48m	0.45m
Machine weight	395kg	482kg	500kg

Standard Model

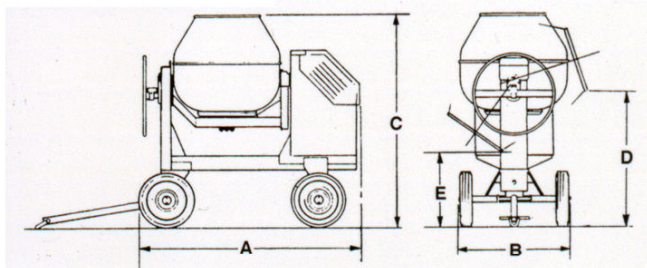

Fast Tow Model

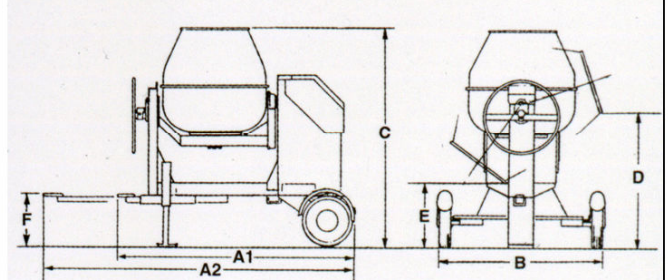

WINGET

Winget Limited

PO Box 41, Edgefold Industrial Estate
Bolton, BL4 0LS, England.

Tel: +44 (0)1204 854650, Fax: +44 (0)1204 854664
email: sales@winget.co.uk, www.winget.co.uk

Dealer Stamp



a **Seddon** Group Company



Due to a policy of continual improvement, the manufacturer reserves the right to change specifications without further notice.